

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number
WO 2004/027170 A1

(51) International Patent Classification⁷: E03D 1/14, 1/22

(21) International Application Number:

PCT/AU2003/001109

(22) International Filing Date: 28 August 2003 (28.08.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2002951505 19 September 2002 (19.09.2002) AU

(71) Applicant (for all designated States except US): CAR-
OMA INDUSTRIES LIMITED [AU/AU]; 10 Market
Street, Brisbane, QLD 4000 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): ENGLAND, Sam,
Robertson [AU/AU]; 9/49 Elizabeth Street, Norwood,
S.A. 5067 (AU).


Published:

— with international search report

(74) Agent: SPRUSON & FERGUSON; GPO Box 3898, Syd-
ney, New South Wales 2001 (AU).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A DUAL ACTUATION BUTTON ASSEMBLY

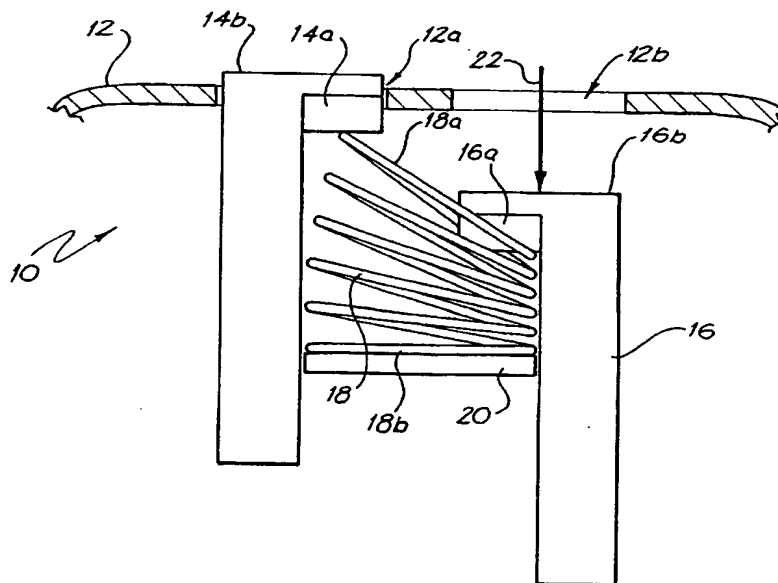

(57) Abstract: A dual actuation button assembly (10) for a dual volume flush cistern. The assembly includes dual actuation button members (14, 16) which are both adapted for movement upon actuation in a common actuation direction. A single spring (18) is adapted to apply a force to both of the button members (14, 16) in a direction opposite to the actuation direction. The spring (18) is adapted to maintain some of said force on one (14, 16) of the button members during actuating movement of the other of the button members (16, 14).